

# Super Sweet

dcjack  
2.1 mm x 5.5mm  
9vdc to 18vdc -negative center

when an external power supply is used, the battery is disconnected from the circuit

remove four screws from the bottom plate to access battery

gain(+20dB)

dip switch  
(see below)

output jack

input jack  
(nominal input -20dbu)

true bypass  
on/off switch

unplug when not in use  
for a longer battery life



## dip switch (external)



mid boost  
(default)



1. high cut



2. high mid boost



3. low mid boost



4. bass boost



## slide switch (internal)




buffered bypass  
(default)



true bypass

To access the slide switch, remove the 4 screws from the backplate. The Buffered setting keeps the buffer active while the pedal is switched off. Activate the True Bypass setting to hard bypass the effect circuit when the pedal is off.

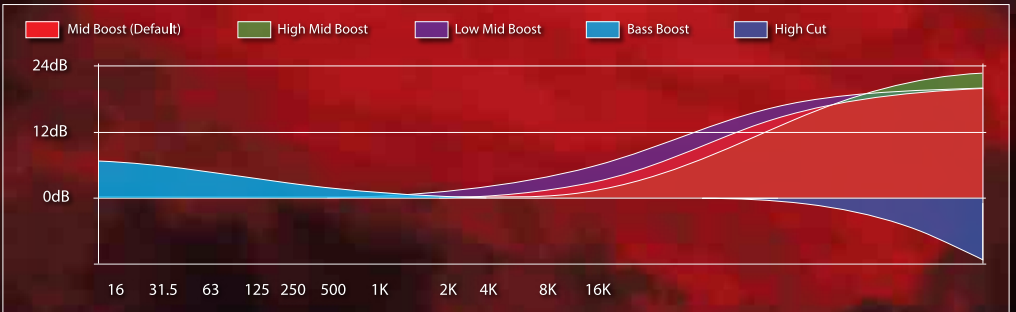

**Xotic Effects**  
CALIFORNIA

specs:  
dimensions(w/d/h): 3.6" x 1.5" x 2.0"  
ac adapter (optional): 9vdc-18vdc  
negative tips (regulated)  
weight: 0.70lbs. (317g)  
input impedance: 1m ohm  
power consumption: 9vdc/5ma  
output impedance: 1k ohm  
battery type: 9vdc (006p) x 1

## sample settings



**solo boost**  
slight boost with pronounced mids



**amp overdrive**  
naturally overdriven amp tones



**tone sweetener**  
warm fat tone



### About the Super Sweet Booster

Many players favor vintage sounding pickups, however due to design and age factors, they (more than often) lack enough power to push the front end of the amp. Those who are knowledgeable about tone know how to bring out the sweetness of the amp with familiar "staple" pedals like TS808 or SD-1. These players have developed a technique and sound based around leaving the overdrive pedal "on" all the time however not everybody likes this preference.

The Super Sweet Boost (SSB) offers a dynamic and transparent +20dB clean boost perfectly tuned for transferring the articulation of your guitar playing. The SSB is incorporated with a high performance Class A preamplifier built around the famous JRC4558 chip. The boost frequency can be selected by an external DIP switch that offers versatile tone shaping capabilities.

Premium components have been selected to ensure maximum durability and tone quality throughout the circuit including a super heavy duty foot switch, audio grade capacitors and custom designed potentiometer.

There's no doubt that it's everybody's dream to discover "THE TONE." The SSB gives you the potential to discover new meaning in your guitar tone.

### Warranty Information

This product is warranted against failures due to defective parts or faulty workmanship for a period of 1 year after delivery to the original owner. During this 1 year period, we, XOTIC EFFECTS will make necessary repairs without charge for parts and labor. However, shipping charges to and from the repair location must be paid by the owner.

\* This warranty applies only to the original owner and is not transferable.

\* This warranty does not cover damage to the product as a result from accident or misuse.

\* This warranty will be cancelled at the sole discretion of us if the product has;

1. Any signs of tampering, unauthorized service, or modifications.
2. Any damage resulting from physical abuse or failure to follow operating warning.

Please contact us via online form below prior to returning the unit to us for repair.

<http://support.xotic.us>

**Note: For international customer, if you purchased the unit from a dealer in your country, please consult with the dealer before returning. You are responsible for all freight charges including custom duties. Also, check with your local Customs Authority and register the merchandise before sending it to the United States for repair. Every country's Customs Authority has a different procedure and documentation for repairs, so it is important that you check before you ship the unit back to us. This is important to avoid unnecessary custom duties.**

**XOTIC EFFECTS**  
14920 Calvert Street  
Van Nuys, CA 91411 USA  
xotic.us  
email: support@xotic.us

*Xotic Effects*  
CALIFORNIA